


ECE 111 - Solution #14

Calibration

1) Find a temperature sensor from www.Digikey.com other than the one covered in class. From the data sheets, determine the resistance vs. temperature relationship.

Digikey sells over 7000 NTC thermistors. Picking a 1k thermistor at random

|  | Product Overview | | Price Break | Unit Price | Extended Price |
|-----------------------------------------------------------------------------------|---------------------------------|---------------------------------|-------------|------------|----------------|
| | Digi-Key Part Number | 445-174901-1-ND | 1 | 0.10000 | \$0.10 |
| | Quantity Available | 22,165 Can ship immediately | 5 | 0.09800 | \$0.49 |
| | Manufacturer | TDK Corporation | 10 | 0.08800 | \$0.88 |
| | Manufacturer Part Number | NTCG104BH102HT1 | 25 | 0.08080 | \$2.02 |
| | Description | THERMISTOR NTC 1KOH | 50 | 0.06460 | \$3.23 |
| | Manufacturer Standard Lead Time | 12 Weeks | 100 | 0.05540 | \$5.54 |
| Detailed Description | | NTC Thermistor 1k 0402 (| 500 | 0.04852 | \$24.26 |
| | | | 1,000 | 0.04158 | \$41.58 |
| | | | 5,000 | 0.03696 | \$184.80 |

NTCG104BH102HT1 TDK Corporation | 445-174901-1-ND DigiKey Electronics

Submit a [request for quotation](#) on quantities greater than those displayed.

$R = 1000 \text{ Ohms at } 25\text{C}$

$B_{25/85} = 4100\text{K}$

$$R \approx 1000 \cdot \exp\left(\frac{4100}{K} - \frac{4100}{298}\right)$$

This is used in various devices...

Overview of the NTCG series

APPLICATIONS


◆ Smart phones



◆ Battery




◆ Wireless charger



◆ LED





```
T = [-25:0.1:25]';  
R = 1000 * exp( 4100 ./ (T+273) - 4100/298 );  
plot(T,R)  
xlabel('Temperature (C)');  
ylabel('Resistance (Ohms)');
```

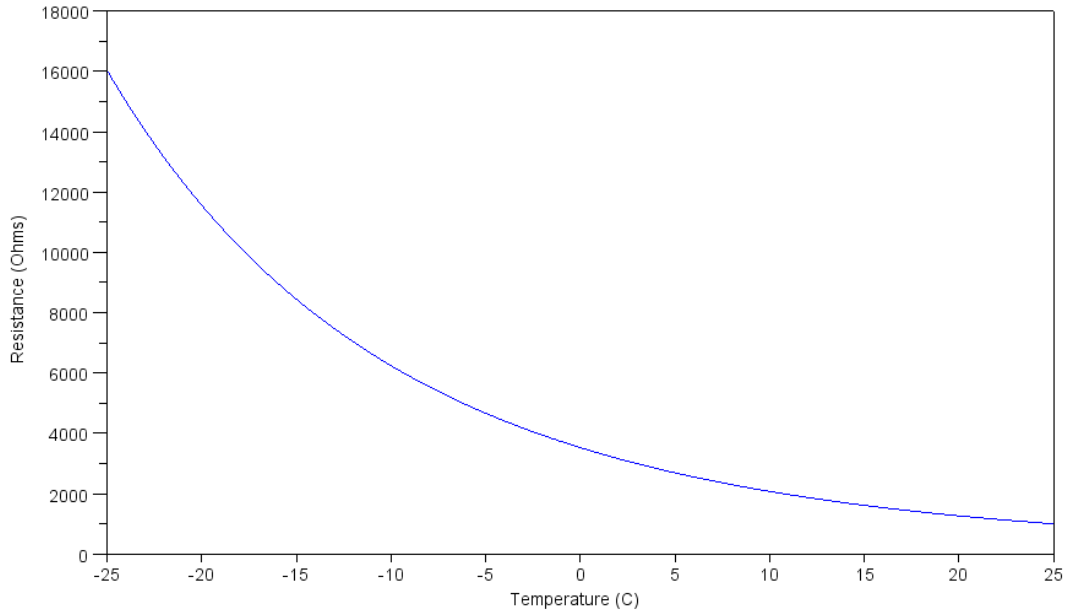

2) Convert this resistance to a voltage using a voltage divider and a +5V source. Plot the voltage vs temperature relationship. Assume a 3k resistor with a voltage divider. This results in

$$V = \left(\frac{R}{R+3000} \right) \cdot 5V$$

```
V = R ./ (3000 + R) * 5;  
plot(T,V);  
xlabel('Temperature (C)');  
ylabel('Voltage (V)');
```

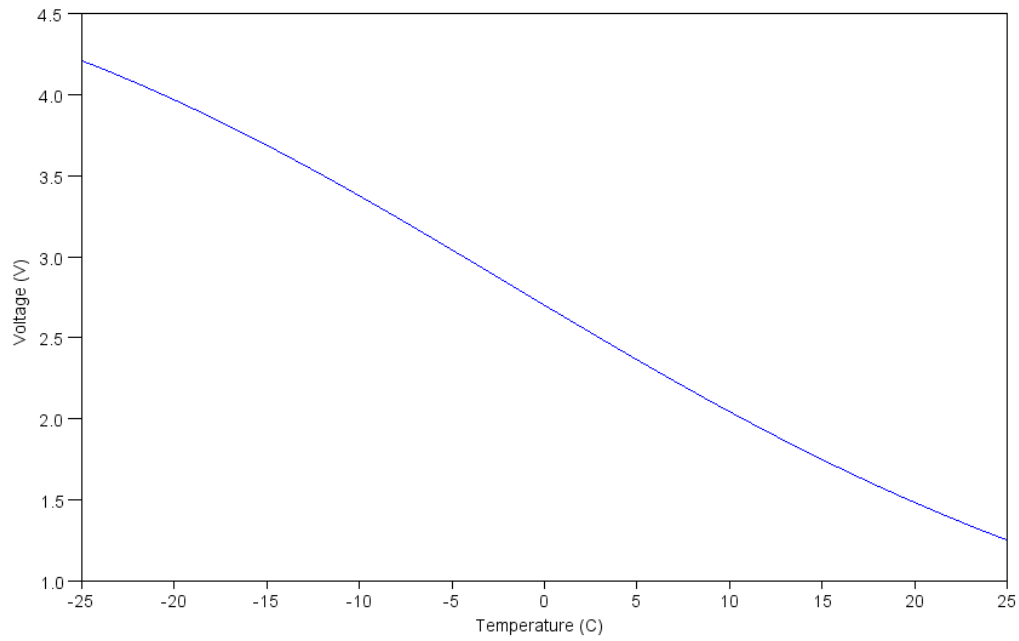

3) Over the range of -25C to +25C, determine a linear calibration curve fit as

$$T \approx aV + b$$


Select the basis to be

$$B = \begin{bmatrix} V & 1 \end{bmatrix}$$

```
B = [V, V.^0];  
A = inv(B'*B)*B'*T
```

```
a -15.951749  
b 43.305877
```

```
plot(V,T,'b',V,B*A,'r');  
ylabel('Temperature (C)');  
xlabel('Voltage (V)');
```

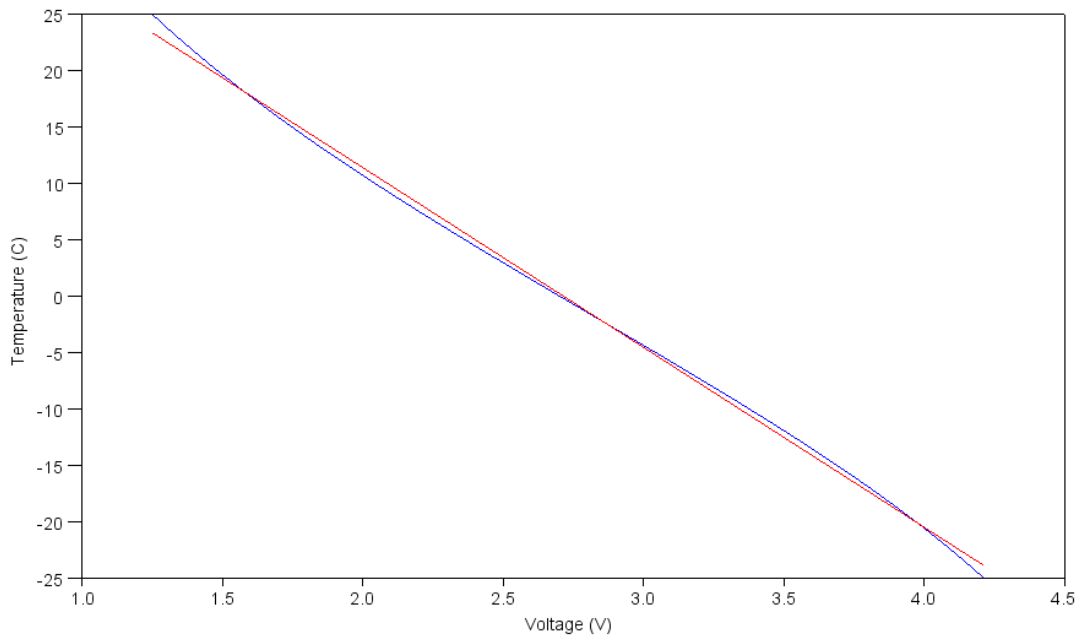

4) Over the range of -25C to +25C, determine a cubic calibration curve fit as

$$T \approx aV^3 + bV^2 + cV + d$$


Choose a new basis

$$B = \begin{bmatrix} V^3 & V^2 & V & 1 \end{bmatrix}$$

```
B = [V.^3, V.^2, V, V.^0];  
A = inv(B'*B)*B'*T
```

```
a  -1.0619365  
b   8.9079773  
c  -39.371678  
d   62.289806
```

```
plot(V,T,'b',V,B*A,'r');  
xlabel('Voltage (V)');  
ylabel('Temperature (C)');
```

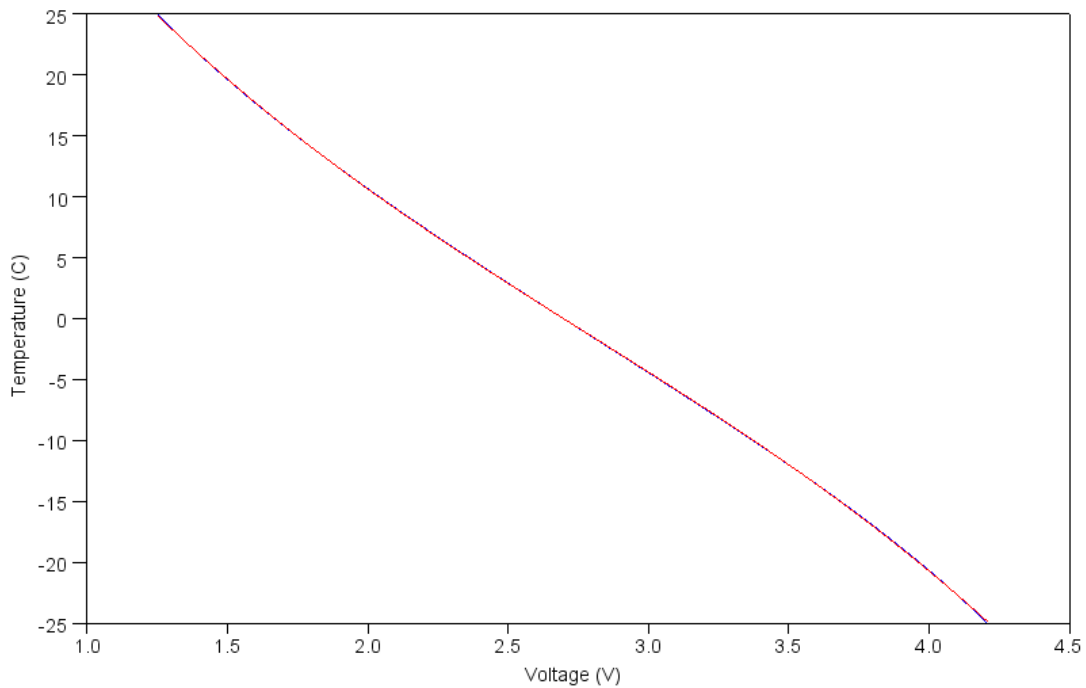

5) If the voltage across your voltage divider is 1.25V, what is the temperature?

Plug V into the above equation

```
V = 1.25;  
T = [V^3, V^2, V, 1] *A
```

T = 24.919828