

Inverse Kinematics for a Rhino Robot

Rhino Robot: Forward Kinematics



Rhino Robot: <http://www.theoldrobots.com/images40/rinoarm4.JPG>

The Rhino Robot is a 4 degree-of-freedom robot used to illustrate programming and control of robot manipulators for classroom settings. To determine the tip position given the joint angles (termed forward kinematics), define the reference frames. One valid definition for the reference frames for a Rhino robot are as follows:

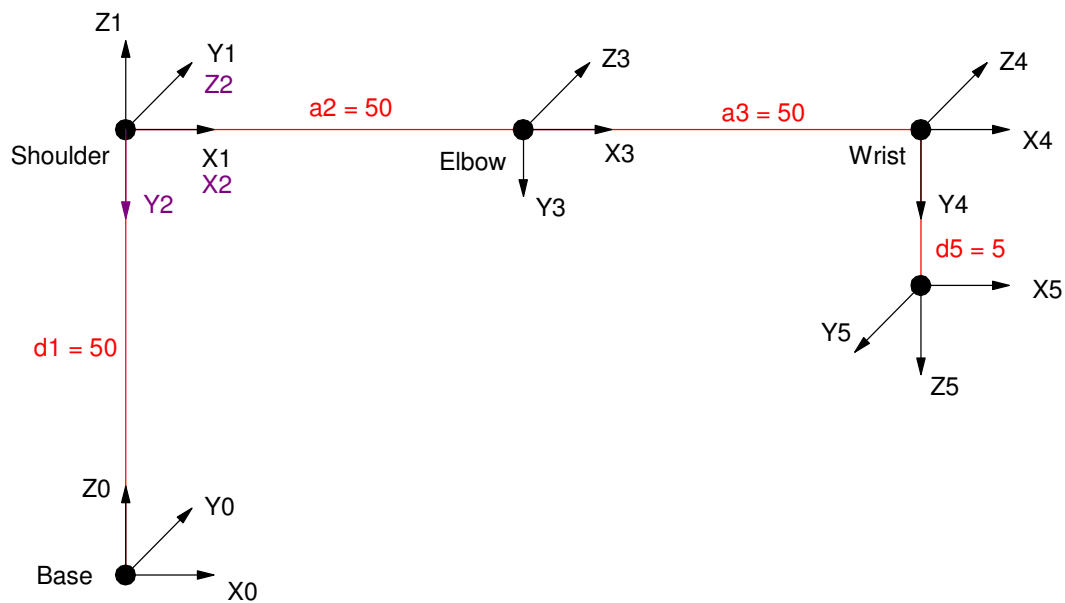

Reference Frames for a Rhino Robot

This results in the following specifications for a Rhino Robot:

Link i	α_{i-1} The angle between the Z_{i-1} and Z_i axis (twist)	a_{i-1} The distance from Z_{i-1} to Z_i measured along the X_{i-1} axis	d_i The distance from X_{i-1} to X_i measured along the Z_i axis (cm)	Q_i The angle between X_{i-1} and X_i measured about the Z_i axis
1	0 deg	0	$d1 = 50$	$Q1$
2	-90 deg	0	0	$Q2$
3	0 deg	$a2 = 50$	0	$Q3$
4	0 deg	$a3 = 50$	0	$Q4$
5	-90 deg	0	$d5 = 5$	0
6				


With all the axis aligned, the forward kinematics simplify somewhat. The previous Matlab routine RRR works for a Rhino robot as well if you change the robot definition:

```
function [Tip] = Rhino(W, TIP)

Q      = [W(1), W(2), W(3), W(4), W(5)];
alpha = [0, -pi/2, 0, 0, -pi/2];
a = [0, 0, 50, 50, 0];
d = [50, 0, 0, 0, 5];

T01a = Transform(alpha(1), a(1), 0, Q(1));
T01  = Transform(alpha(1), a(1), d(1), Q(1));
T12a = Transform(alpha(2), a(2), 0, Q(2));
T12  = Transform(alpha(2), a(2), d(2), Q(2));
T23a = Transform(alpha(3), a(3), 0, Q(3));
T23  = Transform(alpha(3), a(3), d(3), Q(3));
T34a = Transform(alpha(4), a(4), 0, Q(4));
T34  = Transform(alpha(4), a(4), d(4), Q(4));
T45a = Transform(alpha(5), a(5), 0, Q(5));
T45  = Transform(alpha(5), a(5), d(5), Q(5));

(the rest of the code is almost identical to the RRR.m file)
```

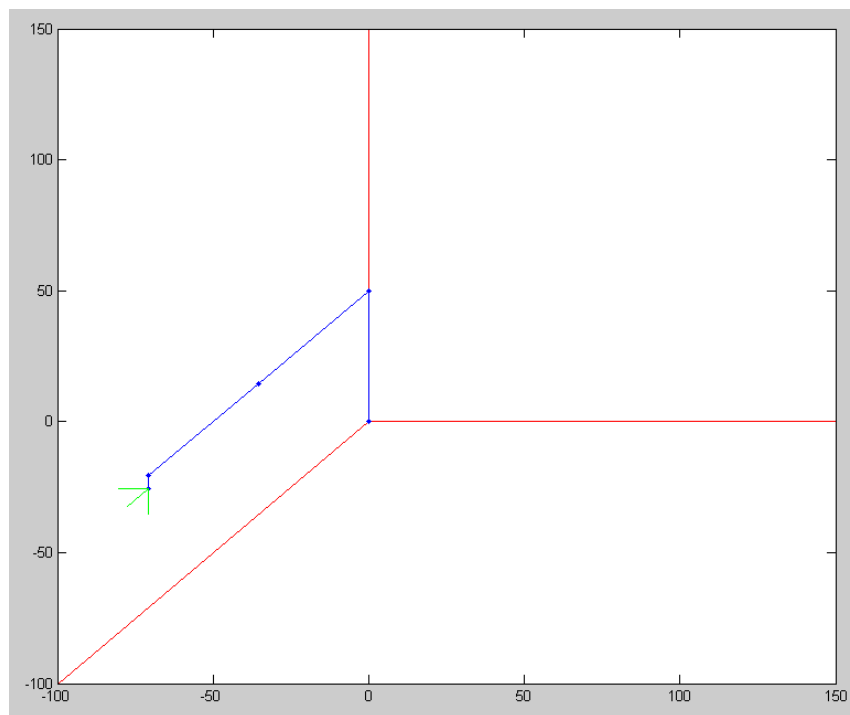

Screen Shot of the Rhino Robot at home position: $Q = \{0, 0, 0, 0, 0\}$

Forward Kinematics: Given the joint angles, the tip position is:

$$P_0 = T_{01}T_{12}T_{23}T_{34}T_{45}P_5$$

where P5 is the origin of reference frame #5 (the tip). For example, at zero position (shown above), the tip position is

```
>> Rhino([0;0;0], [0;0;0;1])
x 100.0000
y  0.0000
z  45.0000
   1.0000
```

Inverse Kinematics solves the inverse problem: given the tip position, determine the joint angles.

Inverse Kinematics: Algebraic Solution:

Given the joint angles, the tip position is known via transformation matrices. From before, the transform matrix to go from reference frame 1 to reference frame 0 is

$$T_{01} = R_x(\alpha_0)D_x(a_0)R_z(\theta_1)D_z(d_1)$$

or

$$T_{01} = \begin{bmatrix} c\theta_1 & -s\theta_1 & 0 & a_0 \\ s\theta_1 c\alpha_0 & c\theta_1 c\alpha_0 & -s\alpha_0 & -s\alpha_0 d_1 \\ s\theta_1 s\alpha_0 & c\theta_1 s\alpha_0 & c\alpha_0 & c\alpha_0 d_1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

For a Rhino robot

$$T_{01} = R_x(0)D_x(0)R_z(\theta_1)D_z(50)$$

meaning

$$T_{01} = \begin{bmatrix} c\theta_1 & -s\theta_1 & 0 & 0 \\ s\theta_1 & c\theta_1 & 0 & 0 \\ 0 & 0 & 1 & 50 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The transform for going from reference frame 1 to 2 is

$$T_{12} = R_x(\alpha_1)D_x(a_1)R_z(\theta_2)D_z(d_2)$$

$$T_{12} = \begin{bmatrix} c\theta_2 & -s\theta_2 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ -s\theta_2 & -c\theta_2 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The transform for going from reference frame 2 to 3 is

$$T_{23} = R_x(\alpha_2)D_x(a_2)R_z(\theta_3)D_z(d_3)$$

$$T_{23} = \begin{bmatrix} c\theta_3 & -s\theta_3 & 0 & 50 \\ s\theta_3 & c\theta_3 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The transform for going from frame 3 to 4 (frame 4 is the tip) is

$$T_{34} = \begin{bmatrix} c\theta_4 & -s\theta_4 & 0 & 50 \\ s\theta_4 & c\theta_4 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The tip position is at

$$P_4 = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

Relative to frame zero, this is

$$P_0 = T_{01}T_{12}T_{23}T_{34}P_4$$

or

$$P_0 = \begin{bmatrix} c_1 & -s_1 & 0 & 0 \\ s_1 & c_1 & 0 & 0 \\ 0 & 0 & 1 & 50 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} c_2 & -s_2 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ -s_2 & -c_2 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} c_3 & -s_3 & 0 & 50 \\ s_3 & c_3 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} c_4 & -s_4 & 0 & 50 \\ s_4 & c_4 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

There is some redundancy in the Rhino robot: there are four angles to define the tip position (which has three constraints). The wrist position has only 3 degrees of freedom (angles 1 .. 3) and three constraints (x, y, z)

$$P_0 = \begin{bmatrix} c_1 & -s_1 & 0 & 0 \\ s_1 & c_1 & 0 & 0 \\ 0 & 0 & 1 & 50 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} c_2 & -s_2 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ -s_2 & -c_2 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} c_3 & -s_3 & 0 & 50 \\ s_3 & c_3 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 50 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

Multiplying this out...

$$P_0 = \begin{bmatrix} c_1 & -s_1 & 0 & 0 \\ s_1 & c_1 & 0 & 0 \\ 0 & 0 & 1 & 50 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} c_2 & -s_2 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ -s_2 & -c_2 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 50c_3 + 50 \\ 50s_3 \\ 0 \\ 1 \end{bmatrix}$$

$$P_0 = \begin{bmatrix} c_1 & -s_1 & 0 & 0 \\ s_1 & c_1 & 0 & 0 \\ 0 & 0 & 1 & 50 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} (50c_3 + 50)c_2 - 50s_2s_3 \\ 0 \\ -(50c_3 + 50)s_2 - 50c_2s_3 \\ 1 \end{bmatrix}$$

$$P_0 = \begin{bmatrix} ((50c_3 + 50)c_2 - 50s_2s_3)c_1 \\ ((50c_3 + 50)c_2 - 50s_2s_3)s_1 \\ -(50c_3 + 50)s_2 - 50c_2s_3 + 50 \\ 1 \end{bmatrix}$$

or, to solve for the three angles, simply solve the following three equations for three unknowns:


$$x = ((50c_3 + 50)c_2 - 50s_2s_3)c_1$$

$$y = ((50c_3 + 50)c_2 - 50s_2s_3)s_1$$

$$z = -(50c_3 + 50)s_2 - 50c_2s_3 + 50$$

Inverse Kinematics: Geometric Solution


The top view of a Rhino Robot tells you Q1:

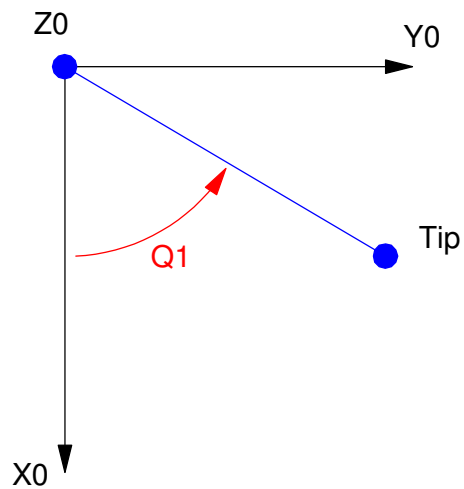

Top view of a Rhino robot

$$\theta_1 = \arctan\left(\frac{x_{tip}}{y_{tip}}\right)$$

To find the angles 2 and 3, take a cross section along the plane of the robot (or assume it is at 0 degrees). The side view of a Rhino Robot is

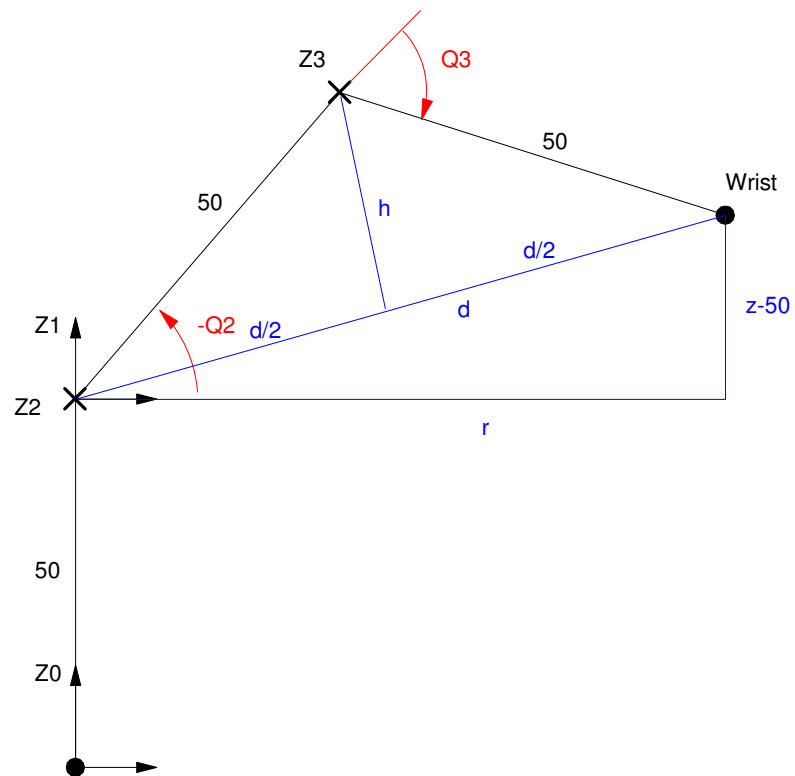

Side view of a Rhino robot

The distances are

$$r = \sqrt{x_{tip}^2 + y_{tip}^2}$$

$$d = \sqrt{r^2 + 50^2}$$

$$h = \sqrt{50^2 - \left(\frac{d}{2}\right)^2}$$

$$\theta_a = \arctan\left(\frac{z-50}{r}\right)$$

$$\theta_b = \arctan\left(\frac{h}{d/2}\right)$$

$$\theta_2 = \theta_a + \theta_b$$

$$-\theta_3 = 180^\circ - 2 \cdot \arctan\left(\frac{d/2}{h}\right)$$

Check: Assume the wrist is at (50, 0, 0)

$$\theta_1 = \arctan\left(\frac{0}{50}\right) = 0^0$$

$$r = 50$$

$$d = 70.71$$


$$h = 35.3553$$

$$\theta_a = \arctan\left(\frac{-50}{50}\right) = -45^0$$

$$\theta_b = \arctan\left(\frac{35.3553}{35.3553}\right) = +45^0$$

$$\theta_2 = \theta_a + \theta_b = 0^0$$

$$\theta_3 = 2 \arctan\left(\frac{35.3553}{35.3553}\right) - 180^0 = -90^0$$

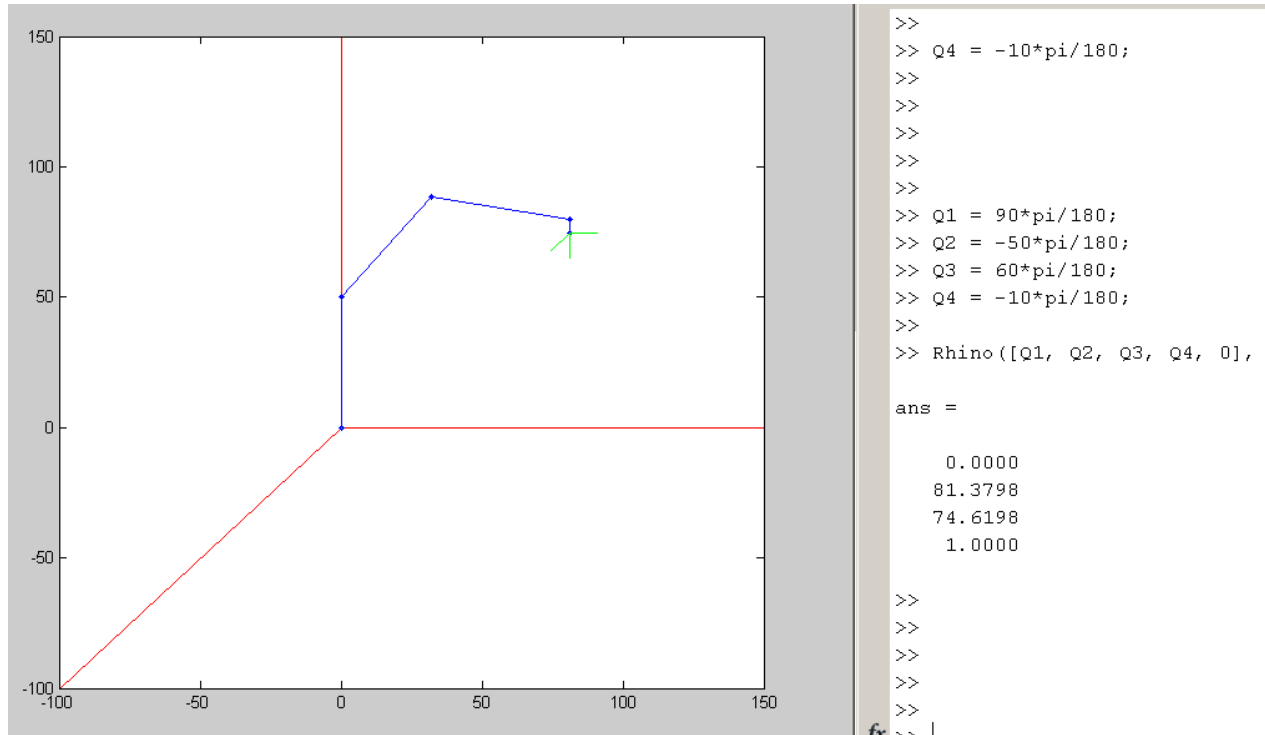

```

>> Q1 = 90*pi/180;
>> Q2 = -50*pi/180;
>> Q3 = 60*pi/180;
>> Q4 = -(Q2+Q3);
>> Tip = Rhino([Q1, Q2, Q3, -(Q2+Q3), 0], [0;0;0;1])

```

```

    0.0000
    81.3798
    74.6198
    1.0000

```

```

>> r = sqrt(Tip(1)^2 + Tip(2) ^ 2)
    81.3798

```

```

>> z = Tip(3) + 5
    79.6198

```

```

>> d = sqrt(r^2 + (z-50)^2)
    86.6025

```

```

>> h = sqrt(50^2 - (d/2)^2)
    25.0000

```

```

>> qa = atan2(z-50,r) * 180/pi
    20

```

```

>> qb = atan2(h, d/2) * 180/pi

```

```
30.0000
>> q2 = -(qa + qb)
-50.0000
>> q3 = pi - 2*atan2(d/2, h)
1.0472
>> q3*180/pi
60.0000
>>
```